

Instability in Leapfrog and Forward-Backward Schemes

WEN-YIH SUN

*Department of Earth and Atmospheric Sciences, Purdue University, West Lafayette, Indiana, and
Department of Atmospheric Sciences, National Central University, Chung-Li, Tao-Yuan, Taiwan*

(Manuscript received 1 July 2009, in final form 23 November 2009)

ABSTRACT

This paper shows that in the linearized shallow-water equations, the numerical schemes can become weakly unstable for the $2\Delta x$ wave in the C grid when the Courant number is 1 in the forward-backward scheme and 0.5 in the leapfrog scheme because of the repeated eigenvalues in the matrices. The instability can be amplified and spread to other waves and smaller Courant number if the diffusion term is included. However, Shuman smoothing can control the instability.

1. Introduction

The forward-backward in time and the leapfrog schemes have been applied to the shallow-water equations by Mesinger and Arakawa (1976), Haltiner and Williams (1980), and the internal gravity waves by Sun (1980, 1984) and many others. However, they can be unstable for $2\Delta x$ waves because of the repeated eigenvalues when Courant number (Co) is 0.5 in the leapfrog scheme (LF) or Courant number is 1 in the forward-backward schemes (FB) in C grid because of the existence of repeated eigenvalues. The weak instability of the LF for a simplified wave equation at $2\Delta x$ wave and $Co = 0.5$ has also been discussed by Durran (1999). For an unstaggered grid, the critical Courant number is 1 (Durran 1999). Here, we provide a detailed discussion on instability of the FB scheme at $Co = 1$. It is also found that the instability will be amplified and spread to the longer waves if the diffusion terms are added in both schemes. On the other hand, Shuman smoothing can be applied to control the instability for both schemes in the shallow-water equations.

2. Numerical schemes and eigenvalues

The 1D linearized shallow-water equations are

$$\frac{\partial h}{\partial t} = -H \frac{\partial u}{\partial x} + \delta \nu \frac{\partial^2 h}{\partial x^2}, \tag{1}$$

$$\frac{\partial u}{\partial t} = -g \frac{\partial h}{\partial x} + \nu \frac{\partial^2 u}{\partial x^2}, \tag{2}$$

where H is the mean depth, g is gravity, h and u are depth perturbation and velocity, and ν is viscosity. The control parameter is $\delta = 0$ or 1, because viscosity is frequently applied in the momentum equations, but may not be applied in the equation of mass field h (or density in the compress fluid; Versteeg and Malalasekera 1995).

In the staggered C grids, the finite-difference equations for the FB scheme become

$$\begin{aligned} \frac{(h_p^{n+1} - h_p^n)}{\Delta t} &= -H \frac{u_{p+1/2}^n - u_{p-1/2}^n}{\Delta x} + \delta \nu \frac{h_{p+1}^n - 2h_p^n + h_{p-1}^n}{\Delta x^2} \\ \frac{(u_q^{n+1} - u_q^n)}{\Delta t} &= -g \frac{h_{q+1/2}^{n+1} - h_{q-1/2}^{n+1}}{\Delta x} + \nu \frac{u_{q+1}^n - 2u_q^n + u_{q-1}^n}{\Delta x^2}, \end{aligned} \tag{3}$$

where $q = p \pm 1/2$, Δx is the spatial interval between the p and $p + 1$ grid points. If a wave-type solution at the n th time step is assumed:

$$h_p^n = \hat{h}^n \exp(ikp\Delta x) = \hat{h}^0 \lambda^n \exp(ikp\Delta x) \tag{4a}$$

and

$$u_q^n = \hat{u}^n \exp(ikq\Delta x) = \hat{u}^0 \lambda^n \exp(ikq\Delta x), \tag{4b}$$

where $i = \sqrt{-1}$, \hat{h}^n , and \hat{u}^n are the amplitude of h and u at the n th time step; k is the wavenumber. The difference equations become

Corresponding author address: Wen-Yih Sun, Department of Earth and Atmospheric Sciences, Purdue University, 550 Stadium Mall Dr. West, Lafayette, IN 47907-2051.
E-mail: wysun@purdue.edu

$$\begin{aligned} \frac{(\hat{h}^{n+1} - \hat{h}^n)}{\Delta t} &= -H\hat{u}^n \frac{\exp(ik\Delta x/2) - \exp(-ik\Delta x/2)}{\Delta x} \\ &\quad + \delta\nu \frac{\exp(ik\Delta x) - 2 + \exp(-ik\Delta x)}{\Delta x^2} \hat{h}^n \\ &= -iH\hat{u}^n X - \delta\nu X^2 \hat{h}^n, \end{aligned} \tag{5a}$$

$$\begin{aligned} \frac{(\hat{u}^{n+1} - \hat{u}^n)}{\Delta t} &= -g\hat{h}^{n+1} \frac{\exp(ik\Delta x/2) - \exp(-ik\Delta x/2)}{\Delta x} \\ &\quad + \nu \frac{\exp(ik\Delta x) - 2 + \exp(-ik\Delta x)}{\Delta x^2} \hat{u}^n \\ &= -ig\hat{h}^{n+1} X - \nu X^2 \hat{u}^n. \end{aligned} \tag{5b}$$

Which can be written as

$$\begin{aligned} \frac{(h_p^{n+1} - h_p^{n-1})}{2\Delta t} &= -H \frac{u_{p+1/2}^n - u_{p-1/2}^n}{\Delta x} + \delta\nu \frac{h_p^{n-1} - 2h_p^{n-1} + h_{p-1}^{n-1}}{\Delta x^2} \\ \frac{(u_q^{n+1} - u_q^{n-1})}{2\Delta t} &= -g \frac{h_{q+1/2}^n - h_{q-1/2}^n}{\Delta x} + \nu \frac{u_{p+1}^{n-1} - 2u_{p-1}^{n-1} + u_{p-1}^{n-1}}{\Delta x^2}. \end{aligned} \tag{8}$$

Using (4a) and (4b), we obtain

$$\begin{aligned} \frac{(\hat{h}^{n+1} - \hat{h}^{n-1})}{2\Delta t} &= -H\hat{u}^n \frac{\exp(ik\Delta x/2) - \exp(-ik\Delta x/2)}{\Delta x} \\ &\quad + \delta\nu \frac{\exp(ik\Delta x) - 2 + \exp(-ik\Delta x)}{\Delta x^2} \hat{h}^{n-1} \\ &= -iH\hat{u}^n X - \delta\nu X^2 \hat{h}^{n-1}, \end{aligned} \tag{9a}$$

$$\begin{aligned} \frac{(\hat{u}^{n+1} - \hat{u}^{n-1})}{2\Delta t} &= -g\hat{h}^n \frac{\exp(ik\Delta x/2) - \exp(-ik\Delta x/2)}{\Delta x} \\ &\quad + \nu \frac{\exp(ik\Delta x) - 2 + \exp(-ik\Delta x)}{\Delta x^2} \hat{u}^{n-1} \\ &= -ig\hat{h}^n X - \nu X^2 \hat{u}^{n-1}. \end{aligned} \tag{9b}$$

The eigenvalue is

$$\begin{aligned} \lambda^2 &= [1 - (1 + \delta)S^2 - 2R^2] \\ &\quad \pm \sqrt{[1 - (1 + \delta)S^2 - 2R^2]^2 - (1 - 2\delta S^2)(1 - 2S^2)} \end{aligned} \tag{10a}$$

or

$$\lambda = \pm iR \pm \sqrt{1 - 2S^2 - R^2} \tag{10b}$$

if $\delta = 1$.

$$\begin{pmatrix} \hat{h}^{n+1} \\ \hat{u}^{n+1} \end{pmatrix} = \begin{pmatrix} 1 - \delta S^2 & -i\Delta t H X \\ -ig\Delta t X(1 - \delta S^2) & 1 - S^2 - R^2 \end{pmatrix} \begin{pmatrix} \hat{h}^n \\ \hat{u}^n \end{pmatrix} \tag{6}$$

The eigenvalue of (6) is

$$\begin{aligned} \lambda &= \left\{ [2 - (1 + \delta)S^2 - R^2] \right. \\ &\quad \left. \pm \sqrt{[2 - (1 + \delta)S^2 - R^2]^2 - 4(1 - S^2)(1 - \delta S^2)} \right\} / 2, \end{aligned} \tag{7}$$

where $X = \sin(k\Delta x/2)/(\Delta x/2)$, $R^2 = gH\Delta t^2 X^2 = (CX\Delta t)^2$, $S^2 = \nu\Delta t X^2$, and $C = \sqrt{gH}$. For simplicity, we set $g = 1$, $H = 1$, and $\Delta x = 1$.

Following the same procedure, the difference equations for the LF scheme are

3. Results and discussion

a. Results without viscosity

Without viscosity (i.e., $\nu = 0$), the FB is neutrally stable, $|\lambda| = 1$, as long as the Courant number $Co = C\Delta t/\Delta x < 1$ according to (7); and the LF is also neutrally stable when $Co = C\Delta t/\Delta x < 0.5$ according to (10a) (Mesinger and Arakawa 1976; Haltiner and Williams 1980).

However, the FB has repeated eigenvalues $\lambda_{1,2} = [(2 - R^2) \pm \sqrt{(2 - R^2)^2 - 4}]/2 = -1$ for $2\Delta x$ waves at $Co = 1$, because $R^2 = (C\Delta t X)^2 = [C\Delta t \sin(k\Delta x/2)/\Delta x/2]^2 = 4$. Equation (6) becomes

$$\mathbf{x}^{n+1} = \begin{pmatrix} \hat{h}^{n+1} \\ \hat{u}^{n+1} \end{pmatrix} = \begin{pmatrix} 1 & -2i \\ -2i & -3 \end{pmatrix} \begin{pmatrix} \hat{h}^n \\ \hat{u}^n \end{pmatrix} = \mathbf{A}\mathbf{x}^n. \tag{11}$$

An eigenvector corresponding to $\lambda_1 = -1$ is $\mathbf{x}_1 = \begin{pmatrix} 1 \\ -i \end{pmatrix}$.

The generated eigenvector \mathbf{x}_2 can be found from

$$\mathbf{A}\mathbf{x}_2 = \lambda_1 \mathbf{x}_2 + \mathbf{x}_1 \tag{12a}$$

and

$$\mathbf{x}_2 = \begin{pmatrix} 0.5 \\ 0 \end{pmatrix}. \tag{12b}$$

If we define a matrix $\mathbf{P} = (\mathbf{x}_1, \mathbf{x}_2) = \begin{pmatrix} 1 & 0.5 \\ -i & 0 \end{pmatrix}$, then, we can have

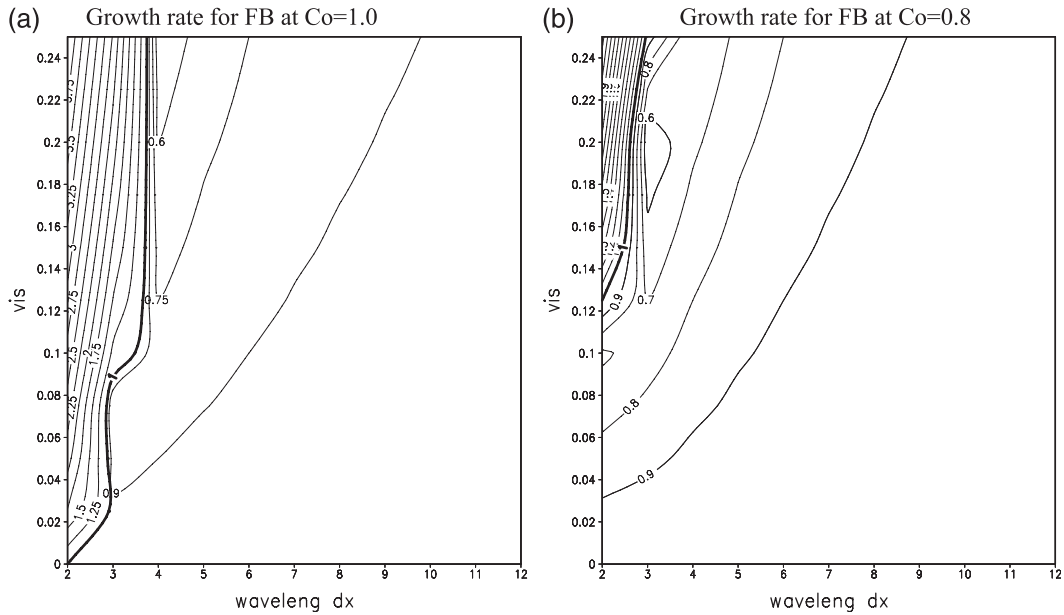


FIG. 1. Growth rate for forward-backward scheme as function of wavelength (Δx) and viscosity (ν) at (a) $Co = 1$ and (b) $Co = 0.8$.

$$\begin{aligned} \mathbf{A}_B &= \mathbf{P}^{-1} \mathbf{A} \mathbf{P} = \begin{pmatrix} 0 & i \\ 2 & -2i \end{pmatrix} \begin{pmatrix} 1 & -2i \\ -2i & -3 \end{pmatrix} \begin{pmatrix} 1 & 0.5 \\ -i & 0 \end{pmatrix} \\ &= \begin{pmatrix} -1 & 1 \\ 0 & -1 \end{pmatrix} = \begin{pmatrix} \lambda & 1 \\ 0 & \lambda \end{pmatrix}, \end{aligned} \quad (13)$$

which is in Jordan block form (Nobel 1969), and since $\begin{pmatrix} \lambda & 1 \\ 0 & \lambda \end{pmatrix}^n = \begin{pmatrix} \lambda^n & n\lambda^{n-1} \\ 0 & \lambda^n \end{pmatrix}$, we obtain

$$\mathbf{A}^n = \mathbf{P}(\mathbf{A}_B)^n \mathbf{P}^{-1} = \begin{pmatrix} 1 & 0.5 \\ -i & 0 \end{pmatrix} \begin{pmatrix} \lambda^n & n\lambda^{n-1} \\ 0 & \lambda^n \end{pmatrix} \begin{pmatrix} 0 & i \\ 2 & -2i \end{pmatrix} \quad (14a)$$

$$\begin{aligned} &= \begin{pmatrix} 1 & 0.5 \\ -i & 0 \end{pmatrix} \begin{pmatrix} (-1)^n & n(-1)^{n-1} \\ 0 & (-1)^n \end{pmatrix} \\ &\quad \times \begin{pmatrix} 0 & i \\ 2 & -2i \end{pmatrix}. \end{aligned} \quad (14b)$$

Hence, the FB becomes weakly unstable, the magnitude linearly increases with time step and with $2\Delta t$ oscillation.

When $Co = 0.5$, (i.e., $R = 1$), and $S^2 = 0$, (i.e., $\nu = 0$), the LF scheme also has the repeated eigenvalues: $\lambda_1 = \lambda_2 = -i$ and $\lambda_3 = \lambda_4 = i$. Hence, it becomes weakly unstable, as does the FB scheme. The weakly instability

of the LF in a simplified wave equation for $2\Delta x$ wave at $Co = 0.5$ has been discussed by Durran (1999) and will not be repeated here.

b. Results with viscosity

Diffusion has been frequently applied to control the noise of the short waves in equations, because the amplification factor is $\lambda = 1 - S^2 = 1 - \nu\Delta t X^2$ when the forward-in-time and centered-in-space scheme is applied to the diffusion equation (Sun 1982). In the FB, viscous terms create unstable $2\Delta x$ and $3\Delta x$ waves at $Co = 1$, and unstable $2\Delta x$ wave at $Co = 0.8$. However, the growth rate becomes less than 1 for longer waves and the maximum damping occurs at $4\Delta x$ or $3\Delta x$ waves (Fig. 1).

In the LF, if $R^2 = 1$, from (10b) we obtain

$$\lambda = \pm iR \pm \sqrt{1 - 2S^2 - R^2} = i(\pm 1 \pm \sqrt{2S^2}). \quad (15)$$

Since the maximum value of $|\lambda|$ is greater than 1 for $S^2 > 0$, the FL is also unstable for $R^2 = 1$, (i.e., $2\Delta x$ wave with $Co = 0.5$). The amplification factor for $2\Delta x$ wave = 2 for $\nu = 0.25$ (i.e., $S^2 = 0.5$), as shown in Fig. 2, because the viscous term enhances the $2\Delta t$ oscillation for the short waves (wavelength $\leq 3\Delta x$). Instability also shows up for $2\Delta x$ wave when $\nu > 0.13$ for $Co = 0.4$. Viscosity has the largest damping at $4\Delta x$ waves when $Co = 1$ in FB and $Co = 0.5$ in LF and at $3\Delta x$ waves when $Co = 0.8$ in FB and $Co = 0.4$ in LF. The effect of viscosity on FB and

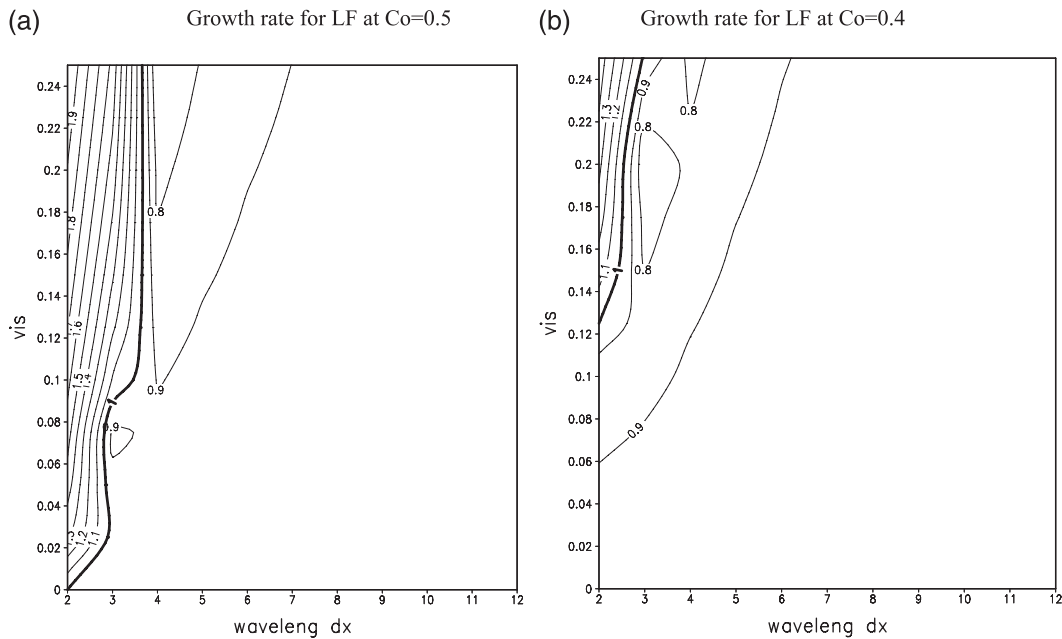


FIG. 2. Growth rate for leapfrog scheme as function of wavelength (Δx) and viscosity (ν) at (a) $Co = 0.5$ and (b) $Co = 0.4$.

LF are similar. Direct integrating (5) and (9) confirms the viscous term amplifying instability of $2\Delta x$ or $3\Delta x$ waves. The instability becomes weaker with $\delta = 0$.

c. Results with Shuman smoothing, but without viscosity

If we integrate (5) and (9) directly with $g = 1, H = 1$, (i.e., $C = 1$), and $\Delta x = 1$. The initial values of u and h are $\hat{h}^0 = 1.0$ and $\hat{u}^0 = 0.0$ for different wavelengths, which represents the wave at the peak potential energy, but without kinetic energy initially and is a popular initial condition.

With $\nu = 0$ and $Co = 1$, the time sequences of \hat{h}^n integrated from FB as function of wavelength are shown in

Table 1; the values of \hat{h}^n integrated using LF with $Co = 0.5$ are shown in Table 2. In the leapfrog scheme, the first time step is integrated with a centered difference in space and forward in time. In addition to $2\Delta t$ oscillations, the magnitude of \hat{h}^n increases linearly with time for $2\Delta x$ wave in both schemes.

A simple fourth-order Shuman smoothing (Haltiner and Williams 1980) is applied to the prognostic variables u and h immediately after the new values are calculated at each time step. The damping factor is $Sh = 1 - [2\eta \sin^2(k\Delta x/2)]^2$, where η is the smoothing coefficient. In the FB scheme, the eigenvalue λ in (14a) is replaced by $\lambda' = Sh \times \lambda$. The magnitude of $n(\lambda')^{n-1}$ starts decreasing when n becomes large. On the other hand, the magnitude of $n(\lambda)^{n-1}$ linearly increases with n , as shown

TABLE 1. Time sequence of height perturbation as function of wavelength for forward-backward scheme ($\nu = 0, \eta = 0$, and $Co = 1$).

n th	$2\Delta x$	$3\Delta x$	$4\Delta x$	$5\Delta x$	$6\Delta x$	$7\Delta x$	$8\Delta x$
0	1.000	1.000	1.000	1.000	1.000	1.000	1.000
1	1.000	1.000	1.000	1.000	1.000	1.000	1.000
2	-3.000	-2.000	-1.000	-0.382	0.000	0.247	0.414
3	5.000	1.000	-1.000	-1.240	-1.000	-0.692	-0.414
4	-7.000	1.000	1.000	-0.382	-1.000	-1.110	-1.000
5	9.000	-2.000	1.000	1.000	-0.000	-0.692	-1.000
6	-11.00	1.000	-1.000	1.000	1.000	0.247	-0.414
7	13.00	1.000	-1.000	-0.382	1.000	1.000	0.414
8	-15.00	-2.000	1.000	-1.240	0.000	1.000	1.000
9	17.00	1.000	1.000	-0.382	-1.000	0.247	1.000
10	-19.00	1.000	-1.000	1.000	-1.000	-0.692	0.414

TABLE 2. Time sequence of height perturbation as function of wavelength for leapfrog scheme ($\nu = 0, \eta = 0$, and $Co = 0.5$).

n th	$2\Delta x$	$3\Delta x$	$4\Delta x$	$5\Delta x$	$6\Delta x$	$7\Delta x$	$8\Delta x$
0	1.000	1.000	1.000	1.000	1.000	1.000	1.000
1	1.000	1.000	1.000	1.000	1.000	1.000	1.000
2	-1.000	-0.500	0.000	0.309	0.500	0.623	0.707
3	-3.000	-2.000	-1.000	-0.382	0.000	0.247	0.414
4	1.000	-0.500	-1.000	-0.809	-0.500	-0.223	-0.000
5	5.000	1.000	-1.000	-1.240	-1.000	-0.692	-0.414
6	-1.000	1.000	-0.000	-0.809	-1.000	-0.901	-0.707
7	-7.000	1.000	1.000	-0.382	-1.000	-1.110	-1.000
8	1.000	-0.500	1.000	0.309	-0.500	-0.901	-1.000
9	9.000	-2.000	1.000	1.000	-0.000	-0.692	-1.000
10	-1.000	-0.500	0.000	1.000	0.500	-0.223	-0.707

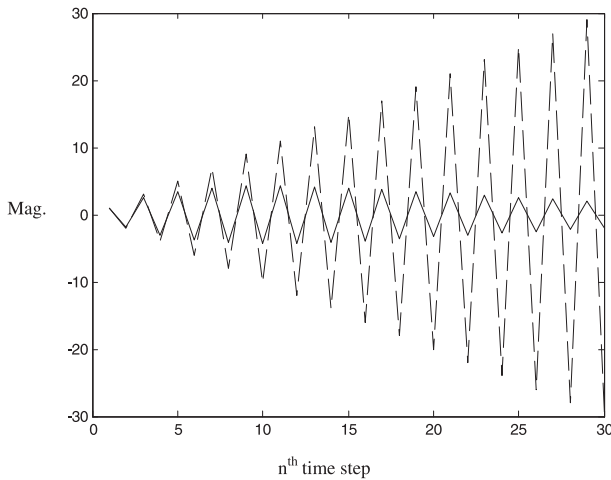


FIG. 3. Magnitude of $n(-1)^{n-1}$ (dashed line) and $n(-0.91)^{n-1}$ (solid line) as a function of the n th time step, where $\lambda' = \text{Sh} \times \lambda = 0.91$ for $\eta = 0.15$.

in Fig. 3. Hence, smoothing can remove the weak instability. The time sequences obtained from the direct integration with smoothing shown in Tables 3 and 4 confirm that smoothing (with $\eta = 0.15$) can control the instability of $2\Delta x$ wave in both FB and LF.

4. Summary

In shallow-water equations, the forward-backward and leapfrog schemes can become unstable for $2\Delta x$

TABLE 3. As in Table 1, but with smoothing ($\nu = 0, \eta = 0.15$, and $\text{Co} = 1$).

n th	$2\Delta x$	$3\Delta x$	$4\Delta x$	$5\Delta x$	$6\Delta x$	$7\Delta x$	$8\Delta x$
0	1.000	1.000	1.000	1.000	1.000	1.000	1.000
1	0.910	0.949	0.977	0.989	0.994	0.997	0.998
2	-2.190	-1.670	-0.913	-0.359	0.006	0.248	0.414
3	2.510	0.486	-0.974	-1.190	-0.978	-0.682	-0.410
4	-1.93E	1.110	0.829	-0.395	-0.983	-1.100	-0.991
5	0.809	-1.330	0.967	0.920	-0.016	-0.687	-0.992
6	0.395	0.072	-0.750	0.963	0.956	0.233	-0.414
7	-1.260	1.140	-0.957	-0.298	0.972	0.973	0.403
8	1.550	-0.985	0.674	-1.130	0.027	0.980	0.982
9	-1.270	-0.237	0.944	-0.415	-0.934	0.254	0.985
10	0.616	1.080	-0.603	0.844	-0.961	-0.658	0.414
11	0.136	-0.654	-0.929	0.935	-0.037	-1.070	-0.397
12	-0.713	-0.445	0.535	-0.241	0.913	-0.680	-0.973
13	0.951	0.948	0.911	-1.070	0.949	0.217	-0.979
14	-0.829	-0.362	-0.471	-0.432	0.047	0.946	-0.414
15	0.450	-0.563	-0.891	0.773	-0.892	0.963	0.391
16	0.015	0.780	0.411	0.906	-0.938	0.259	0.964
17	-0.395	-0.121	0.870	-0.189	-0.056	-0.634	0.973
18	0.577	-0.606	-0.354	-1.010	0.872	-1.050	0.413
19	-0.534	0.596	-0.846	-0.445	0.927	-0.674	-0.385

TABLE 4. As in Table 2, but with smoothing ($\nu = 0, \eta = 0.15$, and $\text{Co} = 0.5$).

n th	$2\Delta x$	$3\Delta x$	$4\Delta x$	$5\Delta x$	$6\Delta x$	$7\Delta x$	$8\Delta x$
0	1.000	1.000	1.000	1.000	1.000	1.000	1.000
1	0.910	0.949	0.977	0.989	0.994	0.997	0.998
2	-0.746	-0.403	0.022	0.313	0.500	0.623	0.706
3	-1.910	-1.540	-0.870	-0.345	0.011	0.250	0.415
4	0.199	-0.567	-0.933	-0.771	-0.483	-0.215	0.003
5	1.760	0.288	-0.970	-1.170	-0.967	-0.676	-0.407
6	0.309	0.751	-0.081	-0.789	-0.975	-0.885	-0.698
7	-0.801	1.110	0.750	-0.406	-0.977	-1.090	-0.986
8	-0.544	-0.052	0.866	0.249	-0.500	-0.888	-0.988
9	-0.303	-1.040	0.954	0.882	-0.027	-0.686	-0.989
10	0.461	-0.605	0.132	0.921	0.459	-0.229	-0.701
11	0.990	-0.203	-0.639	0.949	0.934	0.225	-0.415
12	-0.179	0.478	-0.800	0.339	0.950	0.595	-0.008
13	-1.040	1.040	-0.933	-0.256	0.961	0.959	0.397
14	-0.119	0.175	-0.175	-0.678	0.499	0.967	0.687
15	0.575	-0.568	0.536	-1.080	0.042	0.971	0.973
16	0.287	-0.535	0.736	-0.755	-0.435	0.614	0.977
17	0.046	-0.479	0.906	-0.433	-0.902	0.259	0.979
18	-0.276	0.233	0.212	0.181	-0.926	-0.193	0.697
19	-0.492	0.829	-0.441	0.773	-0.944	-0.640	0.415

wave at $\text{Co} = 1$ in the FB and $\text{Co} = 0.5$ in the LF because of the multiplicity of eigenvalue for $2\Delta x$ waves in both schemes. Instability will be amplified and spread to $3\Delta x$ waves by adding viscous terms, because it enhances the $2\Delta t$ oscillation, which creates unstable $2\Delta x$ and/or $3\Delta x$ waves for both schemes. However, Shuman smoothing can dampen the short waves instability in both schemes.

Acknowledgments. The author would like to thank Dr. M. Shieh, Dr. T. Oh, Dr. J. Lee, Ms. Y. C. Wang, and Ms. Sun for useful discussions and proofreading. The comments from the reviewers are also greatly appreciated.

REFERENCES

Durran, D. R., 1999: *Numerical Methods for Wave Equations in Geophysical Fluid Dynamics*. Springer, 465 pp.

Haltiner, G. J., and R. T. Williams, 1980: *Numerical Prediction and Dynamic Meteorology*. 2nd ed. Wiley, 477 pp.

Mesinger, F., and A. Arakawa, 1976: *Numerical Methods Used in Atmospheric Models*. Vol. 1, GARP Publ. Series, Vol. 17, 64 pp.

Nobel, B., 1969: *Applied Linear Algebra*. Prentice-Hall, 523 pp.

Sun, W. Y., 1980: A forward-backward time integration scheme to treat internal gravity waves. *Mon. Wea. Rev.*, **108**, 402–407.

—, 1982: A comparison of two explicit time integration schemes applied to the transient heat equation. *Mon. Wea. Rev.*, **110**, 1645–1652.

—, 1984: Numerical analysis for hydrostatic and nonhydrostatic equations of inertial-internal gravity waves. *Mon. Wea. Rev.*, **112**, 259–268.

Versteeg, H. K., and W. Malalasekera, 1995: *An Introduction to Computational Fluid Dynamics: The Finite Volume Method*. Longman Scientific & Technical, 257 pp.